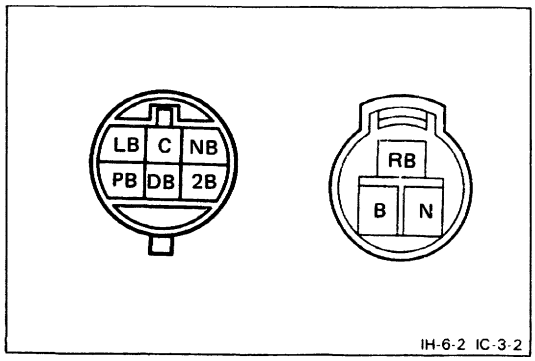

Neutral Start Switch

INSPECTION OF NEUTRAL START SWITCH

Inspect that there is continuity between each terminals.

Shift Position \ Terminal	B	N	PB	RB	NB	DB	2B	LB	C
P	○	○	○						○
R				○					○
N	○	○			○				○
D						○			○
2							○		○
L								○	○