
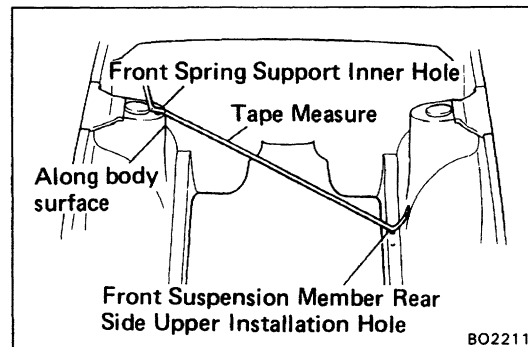
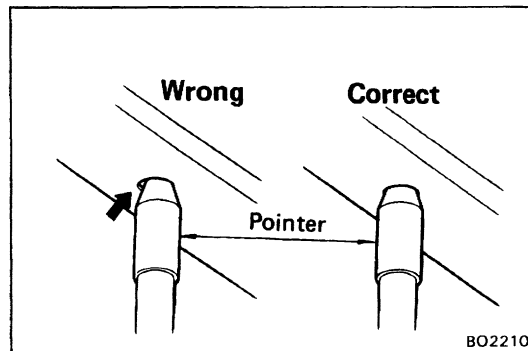
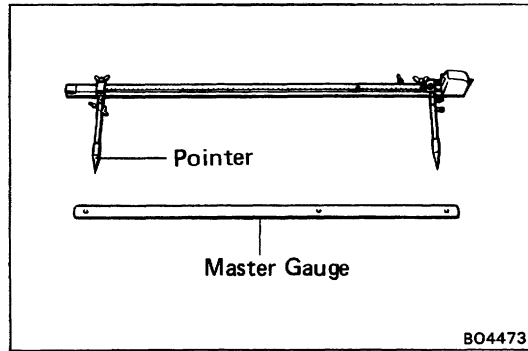
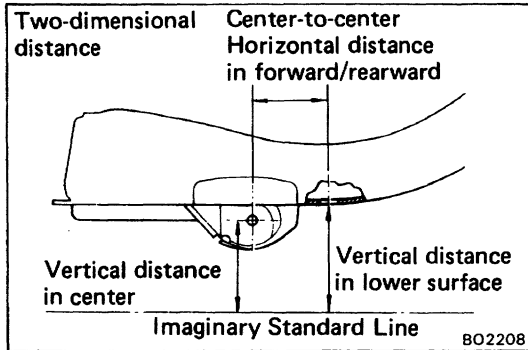


BODY DIMENSIONS

General Information

1. BASIC DIMENSIONS

- (a) There are two types of dimensions in the diagram.
 - (Three-dimensional distance)
 - Straight-line distance between the centers of two measuring points.
 - (Two-dimensional distance)
 - Horizontal distance in forward/rearward between the centers of two measuring points.
 - The height from an imaginary standard line.
- (b) Incases in which only one dimension is given, left and right are symmetrical.
- (e) The dimensions in the following drawing indicate actual distance. Therefore, please use the dimensions as a reference.

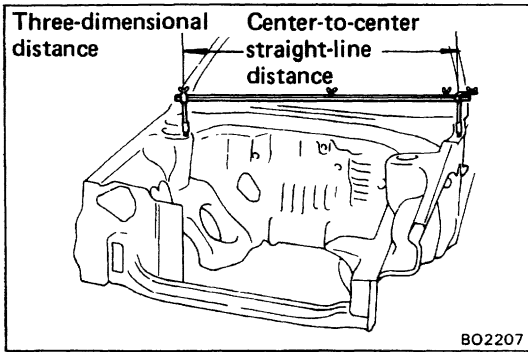

2. MEASURING

- (a) Basically, all measurements are to be done with a tracking gauge. For portions where it is not possible to use a tracking gauge, a tape measure should be used.
- (b) Use only a tracking gauge that has no looseness in the body, measuring plate, or pointers.

HINT:


1. The height of the left and right pointers must be equal.
2. Always calibrate the tracking gauge before measuring or after adjusting the pointer height.
3. Take care not to drop the tracking gauge or otherwise shock it.
4. Confirm that the pointers are securely in the holes.

- (c) When using a tape measure, avoid twists and bends in the tape.
- (d) When tracking a diagonal measurement from the front spring support inner hole to the suspension member upper rear installation hole, measure along the front spring support panel surface.

Body Dimensions

ENGINE COMPARTMENT

(Three-Dimensional Distance)


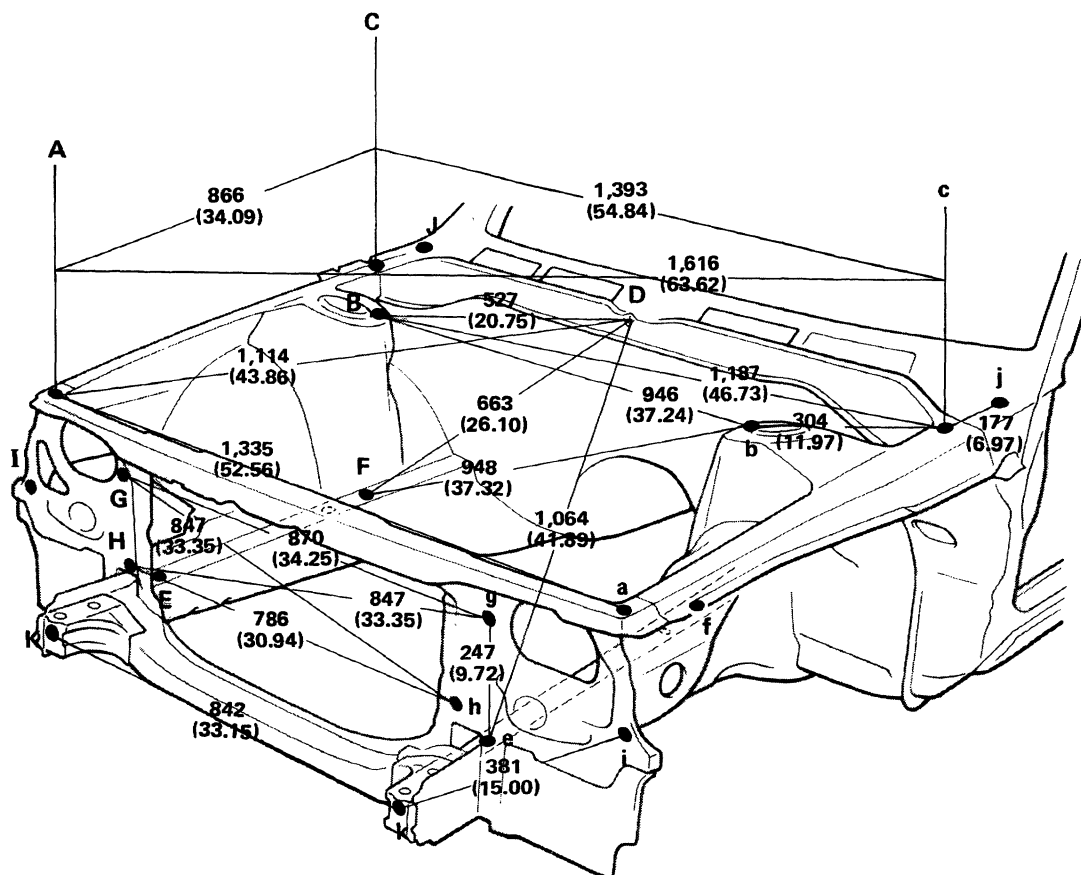


mm (in.)

Symbol	Name	Hole dia.
A, a	Front fender installation nut - front	6 (0.24) nut
B, b	Front spring support hole - inner	11 (0.43)
C, c	Front fender installation nut - rear	6 (0.24) nut
D	Cowl top panel center mark	-
E, e	Front side member bumper installation hole	10 (0.39)
F, f	Suspension member installation hole - rear	15 (0.59)
G	Wire harness clamping hole	7 (0.28)
,	Radiator support standard hole	10 (0.39)
I g	Radiator support standard hole	10 (0.39)
i	Wire harness clamping hole	7 (0.28)
J, j	Cowl top panel standard hole	10 (0.39)
K, k	Front crossmember bumper installation hole	20.5 × 15 (0.807 × 0.59)

UNDER BODY

(Three-Dimensional Distance)

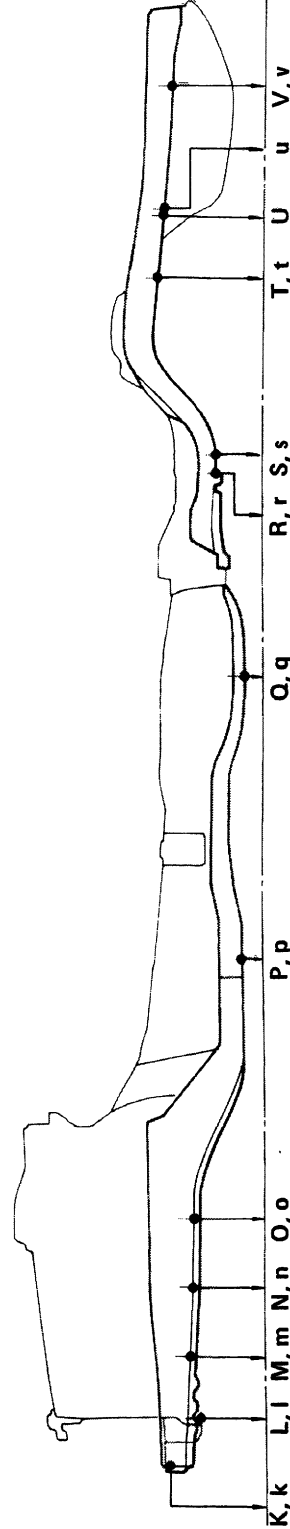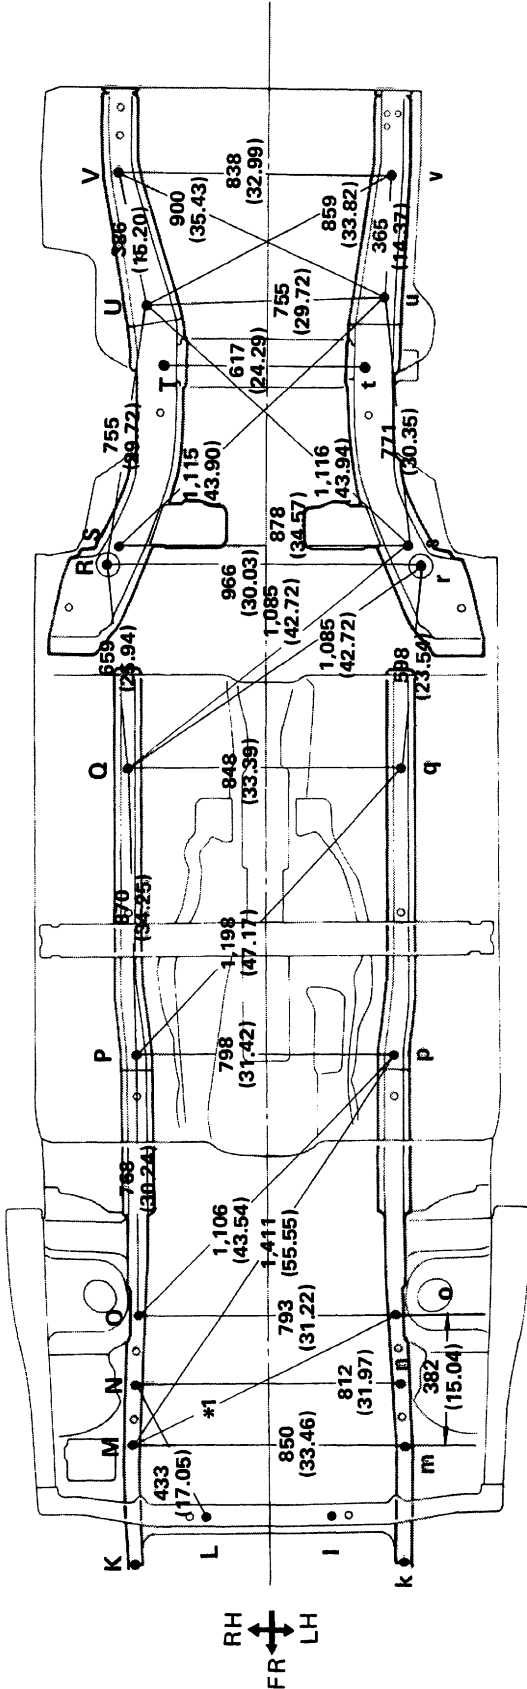


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
K, k	Front side member bumper installation nut	14 (0.55) nut	Q, q	Front floor under reinforcement standard hole	15 (0.59)
L, l	Strut bar bracket installation nut - front : inner	12 (0.47) nut	R, r	Rear suspension member installation nut	20 (0.79)
M, m	Front side member standard hole	15 (0.59)	S, s	Rear floor side member standard hole	15 (0.59)
N, n	Strut bar bracket installation nut - rear : rear	12 (0.47) nut	T, t	Rear suspension member installation hole	25 (0.98)
O, o	Suspension member installation hole - rear	15 (0.59)	U, u	Rear floor side member standard hole	15 (0.59)
P, p	Front floor under reinforcement standard hole	15 (0.59)	V, v	Rear floor side member standard hole	15 (0.59)

BODY OPENING AREAS (SIDE VIEW)

(Three-Dimensional Distance)

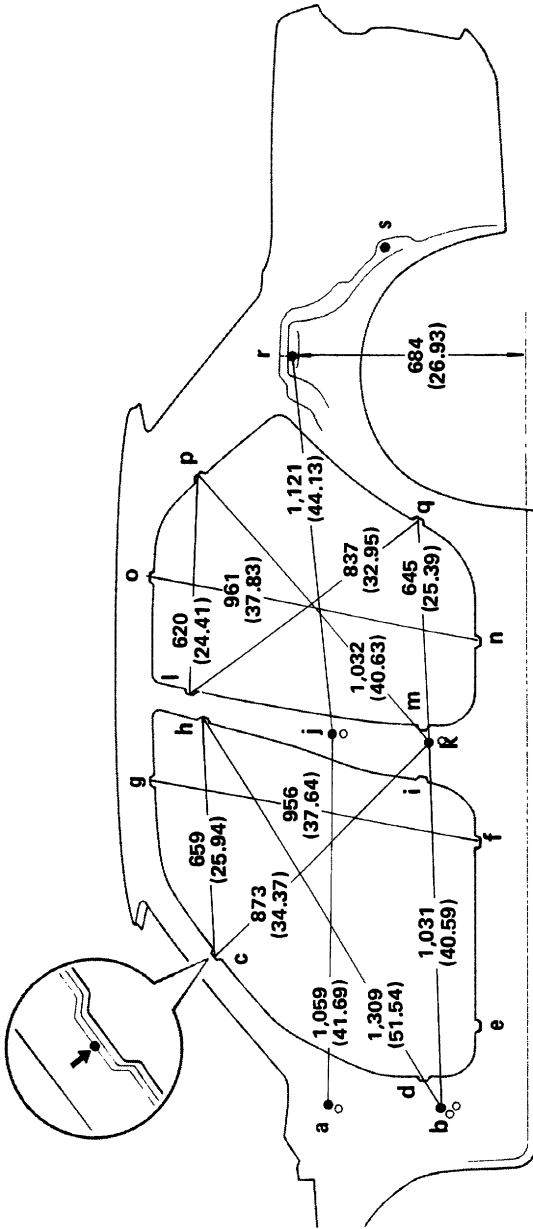

Vehicle Dimensions Left ← → Right

Rocker Panel Bottom Surface

mm (in.)

A-a	B-b	C-c	D-d	E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l	M-m	N-n	O-o	P-p	Q-q	R-r	S-s
1,511 (59.49)	1,514 (59.61)	1,264 (49.76)	1,402 (55.20)	1,411 (55.55)	1,417 (55.79)	1,100 (43.31)	1,240 (48.82)	1,411 (55.55)	1,550 (61.02)	1,543 (60.75)	1,211 (47.68)	1,411 (55.55)	1,415 (55.71)	1,098 (43.23)	1,228 (48.35)	1,412 (55.59)	1,069 (42.09)	1,390 (54.72)

C-f or c-F	C-h or c-H	F-g or f-G	F-h or f-H	L-n or l-N	L-p or l-P	N-o or n-O	N-p or n-P	L-r or l-R	N-r or n-R
1,571 (61.85)	1,415 (55.71)	1,573 (61.93)	1,586 (62.44)	1,557 (61.30)	1,368 (53.86)	1,574 (61.97)	1,615 (63.58)	1,524 (60.00)	1,586 (62.44)

NOTE: For symbols, Capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear)

Symbol	Name	Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front door hinge installation nut	K, k	Rear door hinge installation nut	8 (0.31) nut			8 (0.31) nut
B, b	Front door hinge installation nut	L, l	Center body pillar assembly mark	8 (0.31) nut			—
C, c	Front body pillar assembly mark	M, m	Center body pillar assembly mark	—			—
D, d	Front body pillar assembly mark	N, n	Rocker panel assembly mark	—			—
E, e	Rocker panel assembly mark	O, o	Roof side rail assembly mark	—			—
F, f	Rocker panel assembly mark	P, p	Quarter panel assembly mark	—			—
G, g	Roof side rail assembly mark	Q, q	Quarter panel assembly mark	—			—
H, h	Center body pillar assembly mark	R, r	Rear spring support hole — outer	—			9 (0.35)
I, i	Center body pillar assembly mark	S, s	Quarter wheel housing assembly mark	—			10 (0.39)
J, j	Rear door hinge installation hole	—	—	17 (0.67)			—

BODY OPENING AREAS (OVERHEAD VIEW)

(Three-Dimensional Distance)

